

||||| TERRACO®

Terracoat Excel





Tough and durable alpine scratch finish texture.

A special textured coating that covers surface undulations and lasts long in all weather conditions.

Terracoat Excel is formulated from crushed and precisely graded fillers, acrylic binders and additives which give it elastic properties, long life and durability. Its rich texture and in-built flexibility helps cover defects, minor cracks and undulations in the substrate.



Terracoat Excel



Terracoat Sil Excel



Extremely tough and durable

Both products are tested and certified for their toughness and excellent surface durability.



Excellent impact and abrasion resistance

Both products are designed to withstand impact and abrasion in low lying areas of buildings which are exposed to everyday wear and tear.



Excellent weather and UV resistance

Both products are engineered to withstand the extreme heat of Middle Eastern deserts, severe monsoons of Asia and the harsh cold of the Scandinavian region.



Excellent dirt pick-up resistance

Terracoat Sil Excel is specially formulated with a silicone binder that forms a strong film with excellent resistance to dirt and dust.



Other Features and Benefits

- ◆ Outstanding flexibility which reduces the possibility of cracking and flaking
- ◆ Good vapour permeability allows the substrate to breathe reducing water vapour damage
- ◆ Available in four grain sizes and a variety of colours providing various aesthetic design options



Terracoat Excel is perfect for

- ◆ Exterior and interior applications
- ◆ EIFS systems
- ◆ New work and renovation / retrofit projects
- ◆ All types of buildings – residential, commercial, leisure, educational and more

Areas of use

- ◆ Rendered surfaces
- ◆ Cement fibre boards
- ◆ Sprayplaster
- ◆ Gypsum drywall
- ◆ Chipboard
- ◆ Concrete

Recommended for:



How to use

New work

- 1 Roller apply 1 coat of Terraco P Primer or Tex Primer.
- 2 Allow to cure.
- 3 Apply Terracoat Excel based on required performance option and grain sizes.

Renovation / Retrofit

- 1 All cracks, chips, voids and damages should be repaired with appropriate filler.
- 2 Prepare surface by removing loose or flaking paint, grease, dirt and grime.
- 3 Spot prime exposed areas appropriately.
- 4 Proceed as per new work.



Vertical

Cross-Hatch

Random

Guideline Spread Rates

Onto cementitious substrate, cement fibre board.


Material Consumption	1.0mm: 1.5-2.0 kg/m ²
	1.5mm: 2.0-2.5 kg/m ²
	2.0mm: 2.5-3.0 kg/m ²
	3.0mm: 3.5-4.5 kg/m ²

**Material consumption may vary depending on substrate conditions*

Technical Data

Suitable Primer	Terraco P Primer or Tex Primer
Dilution / Thinning	Water if required
Drying Time	3 – 4 hours
Specific Gravity	1.70
Viscosity	35 – 55 cps
Colours	50 standard colours
Packaging	25 kg plastic pails
Storage	12 months in original unopened containers
Application Method	Trowel



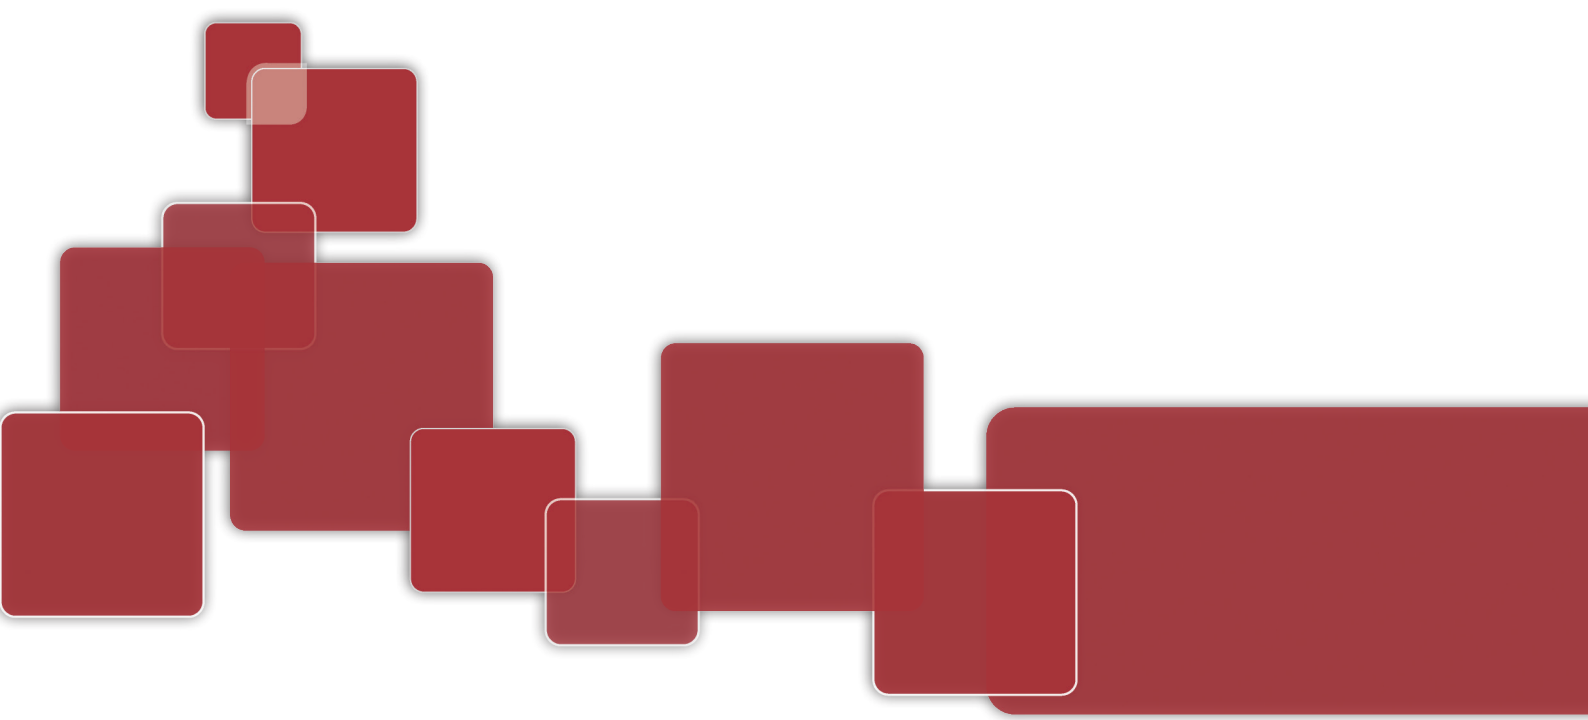

www.terraco.com

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • ALGERIA • EGYPT
SOUTH AFRICA • JORDAN • UAE • THAILAND • VIETNAM • CHINA • KOREA